

Top-of-Dock Levelers

'TODH' Series - Hydraulic



AVAILABLE MODELS / STANDARD FEATURES - ALL MODELS 72" WIDE, 15" Lip

- () TODH7220 - 20,000 lbs. capacity
- () TODH7225 - 25,000 lbs. capacity
- Pump/Motor: 120v / 1ph / 60hz, Self-contained
- Control: Rotary-switch or Push-button, NEMA enclosure

Standard Features:

- Mounting: Installs on floor & edge of loading dock - (*pit not required*)
- Space Required: Less than 3' back from dock edge
- Service range: 14" (10" Above / 4" Below Dock)
- Bumpers: Molded cord rubber bumper, steel bump block, 15" overall projection from dock face
- Construction: 55,000 psi High-strength steel deck and lip plate
- Grease Fittings




**Specializing in Dock Equipment
& Scissor Tables**

Top-of-Dock Levelers

OPTIONS

- 17" Lip
- Tapered Lip
- Key Lock Operation
- Rust Inhibiting Primer Coat
- Abrasive Surface
- Motor/Pump: 208-460v/3ph
- Approach Plates
- Face Plates
- Embedded Channel

OPERATION DIAGRAM

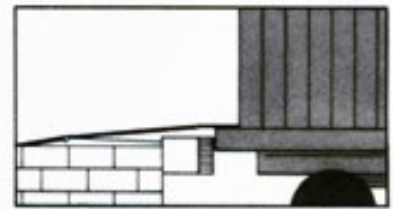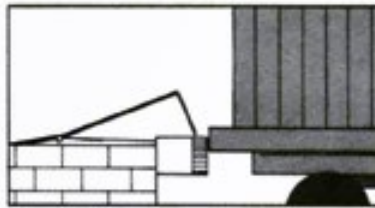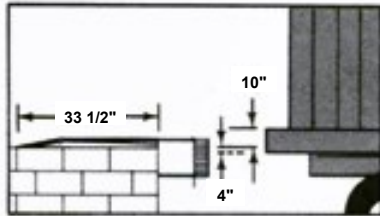

ABC Docks, LLC
P.O. Box 1028
Franklin, TN 37065-1028
Ph) 800-394-5944 / 615-807-1141
Fax) 615-807-1752
Web: www.aaronbradley.com
Email: sales@abcdocks.com

Distributed By: