


DOCK SEALS




“DS” SERIES

- High density foam assures maximum compression and resilience.
- Tight seal keeps out weather
- Head pads available in 12”, 18” and 24” heights.
- Lock-stitched seams with high tensile nylon filament thread provide excellent weather resistance.
- Best application; door sizes 7’w x 8’h to 9’w x 9’h.

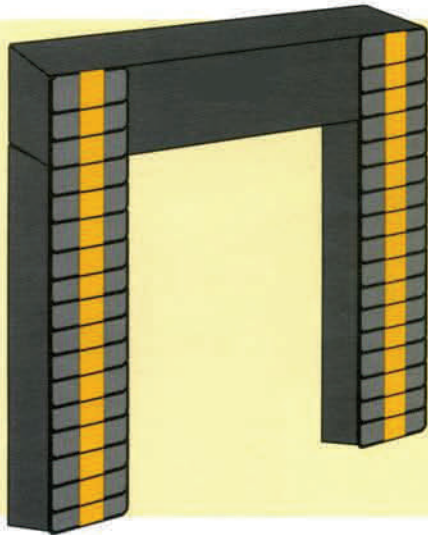

“DSC” SERIES

- Head curtain style with 3/4” galvanized pipe for frontal support.
- Variable curtain lengths to meet customer need.
- Optional: Velcro splits and rope pull up.
- Best application; door sizes 7’-8’w x 10’h.

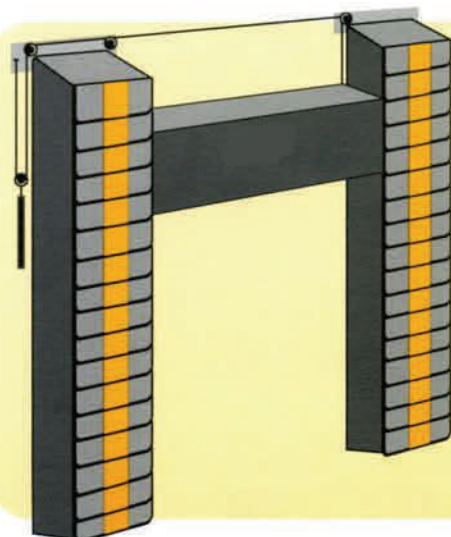

“DSA” SERIES

- Full range manual adjustment with center pull down strap.
- Single weighted counter-balanced adjustment.
- Full 36” of head pad vertical movement to service a wide range of truck heights.

“DS” SERIES

Foam dock seal shall be Model DS____, to fit door size ____ (w) x ____ (h). Unit to consist of two polyurethane foam side pads and one head pad bonded to □ 2” thick pressure treated lumber or □ formed steel galvanized frame.

“DSC” SERIES

Foam dock seal shall be Model DSC____, to fit door size ____ (w) x ____ (h). Unit to consist of two polyurethane foam side pads bonded to □ 2” thick pressure treated lumber or □ formed steel galvanized frame. Head member to be curtain style with 4” thick, □ (C4) or 1” thick □ (C1), foam face covered with standard fabric-per model or curtain only □ (C1), with standard fabric.

“DSA” SERIES

Foam dock seal shall be Model DSA____, to fit door size ____ (w) x ____ (h). Unit to consist of two polyurethane foam side pads bonded to □ 2” thick pressure treated lumber or □ formed steel galvanized frame and one (12”) resilient head pad with follower curtain (adjustable by means of a single weighted counter-balance system).

ALL MODELS

Base fabric cover to □ Hypalon, □ AB500 or □ Vinyl, with a weight of ____ oz/sq. yd. Options: Wear Pleats □ Wear Face □ to be ____ fabric with a weight of ____ oz/sq. yd. Wear Pleat exposure to □ 4”, □ 8”, □ 16” and to extend onto ends of head member. Color to be: ____ base fabric and ____ pleats or wear face. Unit includes full length 3” wide yellow guide stripe.

DOCK SEAL ARCHITECTURAL SPECIFICATIONS

ABC Docks, LLC

